

Portable Mo^{ility} Access Bathrooms

Luxury Sewer Connected Wheelchair Access Toilet/ Bathroom Requirements Check List

There are some important factors that you need to consider before hiring one of our wheelchair accessible portable toilets or bathrooms.

Please read the following requirements carefully.


- **Suitable access is required.**

Toilet/ Bathrooms are delivered via a Ute and trailer. They are slid off the trailer and can be wheeled a short distance into position via jockey wheels mounted to it. You require a minimum clear access pathway of 2.400m in width, 2.500m in height to wheel the toilet around. It must be on a hard surface such as concrete, pavers etc and be fairly level. Under no circumstances will the driver wheel the toilet/bathroom up or down stairs (not even one). It is appreciated if the site is clear of obstructions before we arrive to make set up as easy as possible for us, as we do a lot of deliveries per day. Our wheelchair access toilet/bathroom is extremely unique as they have a built in Macerator pump that pumps the toilet waste directly out of the toilet and into the sewer system on your property. The shower waste water flows out the bottom of the unit onto the ground. The doorway lip/threshold is 20mm high. The entrance door is fitted with a door closer and lock for privacy and is a 900mm outward opening door.

- **Electricity** is standard **10 AMP/ 240 volts power supply**. The toilet/bathroom requires a **double power point**. Please ensure the power points are in good condition. **We supply 30 metre leads that are tagged and tested for your safety**. No power boards or double adaptors can be used.


- **Water** needs to be connected so a tap is required. Preferably gardens tap under mains or pump pressure. **We will supply the tap connection and 20 metres of quality hose**. Extra hose can be supplied at your request. **Check to see if your tap leaks when turned on**.

- **Sullage** is discharged through a **32mm flexible hose** pumped automatically into your existing sewer via your overflow relief gully, inspection opening, or similar access point (see picture). **Inspect your outside sewer system for a suitable opening**. If in doubt please contact your local plumber or arrange a pre-hire inspection (costs will apply). Septic tanks and envirocycle type systems can be used, it's the clients responsibility to inform us which hole the waste pipe is to go into. We supply all necessary hoses and connections. **Please advise us if the distance to sewer services is greater than 20 metres. Maximum distance is 50 metres with a one meter rise**.

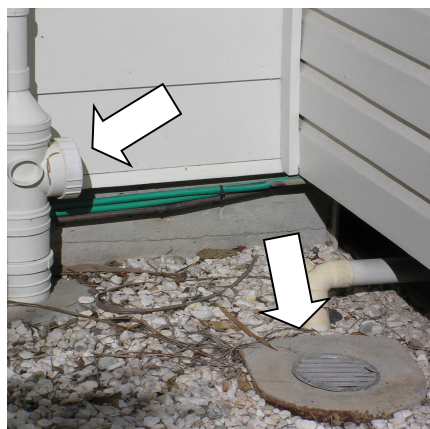

Portable Mo^{ility} Access Bathrooms

- If we cannot install on delivery due to unsuitable access or services you will forfeit your whole hire payment or part thereof.
- Ground must be **reasonably level**. If the site is not level please inform us.
- If you **supply labour** to manoeuvre the toilet/bathroom into position by hand then the **same labour must be provided on pick up or you may be charged extra**.
- A **security deposit** may be required which is refundable once the toilet and its accessories are returned in the same condition as delivered.
- Toilet/ bathroom must be cleaned out before pick up. Excessive dirt and grime will attract a cleaning fee dependant on time required to return the toilet to the same condition it was in when handed over to you.
- Toilet/ bathroom must be left plugged in and turned on when we arrive so we can pump out any waste in the toilet and pump itself.

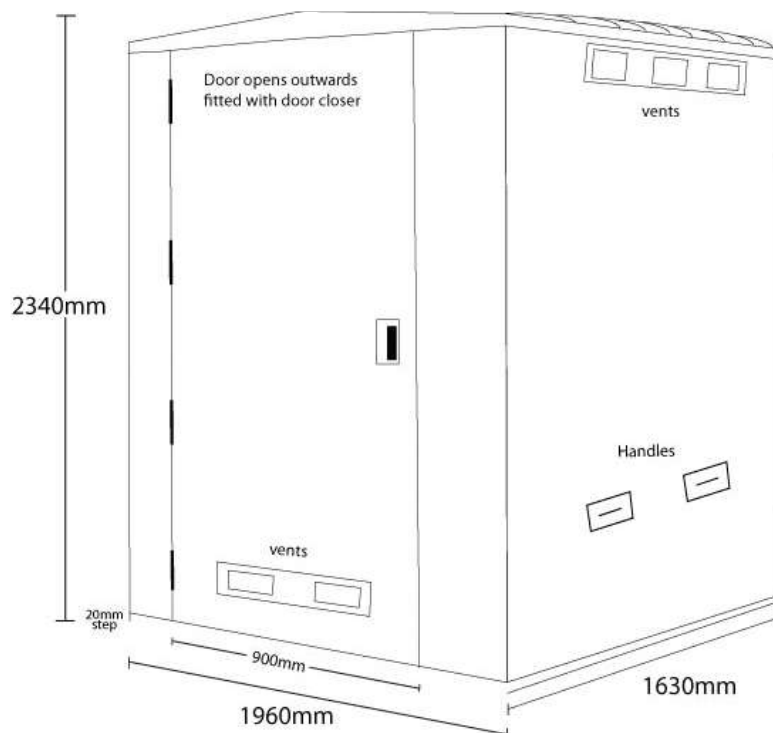

“For all your portable bathroom solutions”